

Wall-hung compact elongated toilet, dual-flush

K-6299

Features

- One-piece wall-hung toilet
- Compact elongated bowl offers added comfort while occupying the same space as a round-front bowl
- Mounting hardware is completely concealed, giving a sleek, seamless look that is easy to clean
- Includes wall-hung bowl with Reveal™ Quiet-Close™ seat
- Requires in-wall tank and carrier system, and flush actuator plate (sold separately)

Installation

This product is not designed or intended for bariatric use

Required Products/Accessories

K-6284 2" x 6" In-wall tank and carrier system

10

K-18829 2" x 4" In-wall tank and carrier system K-5413 Flush Actuator Plate

or

K-18829 2" x 4" In-wall tank and carrier system K-4177 Flush Actuator Plate

or

K-18829 2" x 4" In-wall tank and carrier system K-8857 Flush Actuator Plate

or

K-18829 2" x 4" In-wall tank and carrier system K-75890 Flush Actuator Plate

or

K-18829 2" x 4" In-wall tank and carrier system

Recommended Products/Accessories

K-23726 Drain treatment

Included Components

K-4008 Reveal™ Quiet-Close™ elongated toilet seat





Codes/Standards

ASME A112.19.2/CSA B45.1
ASME A112.19.14
DOE - Energy Policy Act 1992
EPA WaterSense™
California Energy Commission (CEC)
ADA
ICC/ANSI A117.1
CSA B651
OBC
NOM Standards
NOM 009-CNA

KOHLER® Toilets and Seats Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.


Color Code Description

0 White

7 Black Black™





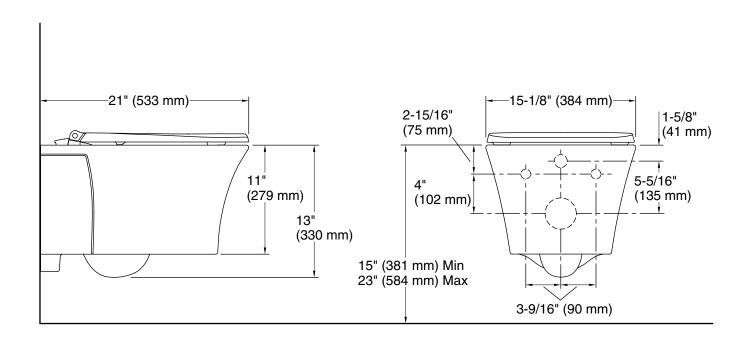

Technical Information

All product dimensions are nominal.

Toilet type: Wall-mount

Waste Outlet: Wall

Bowl shape: Elongated

Flush type: Class Five Siphonic Dual-Flush

Trap passageway: 3" (76 mm)

Water surface size: 4-1/2" x 5-1/2" (114 mm x 140 mm)

Rim to water 8-3/16" (208 mm)

surface:

Seat-mounting 5-1/2" (140 mm)

holes:

Notes

Install this product according to the installation instructions.

Toilet height is dependent on carrier settings. ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.

Accessibility standards may require controls to be located on the open side of the toilet.

