

AP Wall-Hung Toilet, 1.28 GPF & 0.9 GPF

FEATURES

AP Bowl

- DYNAMAX TORNADO FLUSH® system, high efficiency (1.28 GPF/0.9 GPF)
- CEFIONTECT® ceramic glaze - prevents debris, mold from sticking to ceramic surfaces
- Universal Height
- Elongated front bowl

DuoFit In-Wall Tank

- Dual flushing system, high-efficiency (1.28 GPF/4.8 LPF & 0.9 GPF/3.4 LPF) Avg. flush 1.03 GPF
- Adjustable 15"-19" mounting height
- Saves up to 9" of floor space compared to standard floor-mounted toilet
- Supports up to 880lbs
- Commercial 2" x 6" or optional residential installation with 2" x 4" wall studs with waste outlet kit
- Copper supply line

Push Plate

- YT930
Basic Round Push Plate
#WH White Matte or #MS Matte Silver

KIT COMPONENTS

- CT426CFG#01
AP Wall-Hung Toilet
- WT172M
In-Wall Tank System (Copper Pipe)
- YT930
Basic Round Push Plate
#WH White Matte or #MS Matte Silver

Available Options

- YT920#WH - White Matte Basic Square Push Plate
- YT920#MS - Matte Silver Basic Square Push Plate
- YT970#SS - Stainless Steel Wall Square Push Plate
- YT980#SS - Stainless Steel Wall Round Push Plate
- SS114 - SoftClose Seat

COLORS/FINISHES

- Standard
#01 Cotton



 **DYNAMAX
TORNADO FLUSH**

 **SD Skirted Design**

 **CEFIONTECT**

CODES/STANDARDS

- Meets or exceeds:
 - Bowl: ASME A112.19.2/CSA B45.1, ASME A112.19.14
 - Carrier System: ASME A112.6.2
 - Tank Trim: IAPMO PS50, CSA B125.3, ASSE1002
- Certifications: IAPMO (cUPC), EPA WaterSense State of Massachusetts, City of Los Angeles and others
- Legislative compliance: California AB715, California Green Building Code, City of Los Angeles Water Efficiency Ordinance
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others
- Complies with CA Prop 65 warning requirements



CWT426CMFG

AP Wall-Hung Toilet, 1.28 GPF & 0.9 GPF

PRODUCT SPECIFICATIONS

| | CT426CFG | WT172M |
|---------------------|---|---|
| Water Use | 1.28 GPF & 0.9 GPF (4.8 LPF & 3.4 LPF) | 1.28 GPF & 0.9 GPF (4.8 LPF & 3.4 LPF) |
| Flush System | DYNAMAX TORNADO FLUSH® | Dual flushing |
| Min. Water Pressure | 8 psi (static) | 8 psi (static) |
| Water Surface | 5-1/2" X 4-1/8" | |
| Trap Diameter | 2-1/8" | |
| Installation Height | 15" to 19" | 15" to 19" |
| Trap Seal | 2-1/8" | |
| Warranty | One Year Limited Warranty | One Year Limited Warranty |
| Material | Vitreous China | Various |
| Shipping Weight | 68 lbs | 38 lbs |
| Shipping Dimensions | 22" L x 14.6" W x 16.5 H | 48" L x 26-1/2" W x 6" H |

CT426CFG

This universal height, high efficiency DYNAMAX TORNADO flushing system toilet shall be 1.28 GPF & 0.9 GPF. Toilet shall have CEFIONTECT® ceramic glaze. Toilet shall be mounted to in-wall tank system, elongated front bowl and wall-mounted push-button type trip lever. Toilet shall be TOTO Model CT426CFG#01.

YT930


Dual Button Push Plate

WT172M


This universal height, high-efficiency, dual flushing, in-wall tank system toilet shall be 1.28 GPF & 0.9 GPF. Requires TOTO toilet model CT426CFG. In-Wall tank system shall be TOTO Model WT172M.

PRODUCT DIMENSIONS

CT426CFG

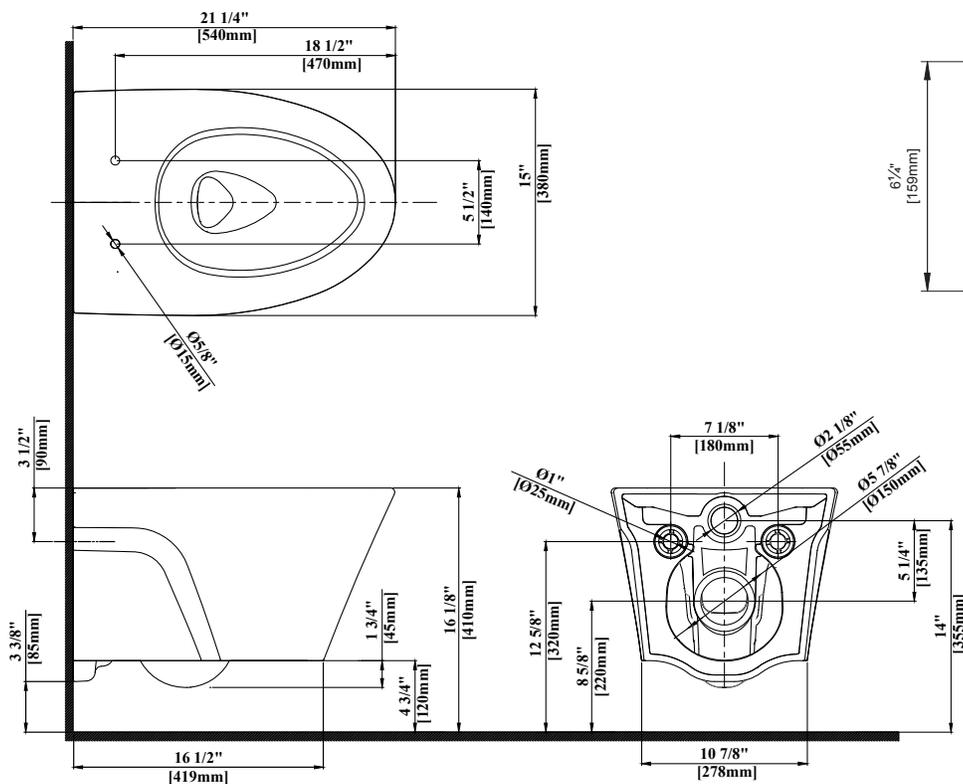

YT930

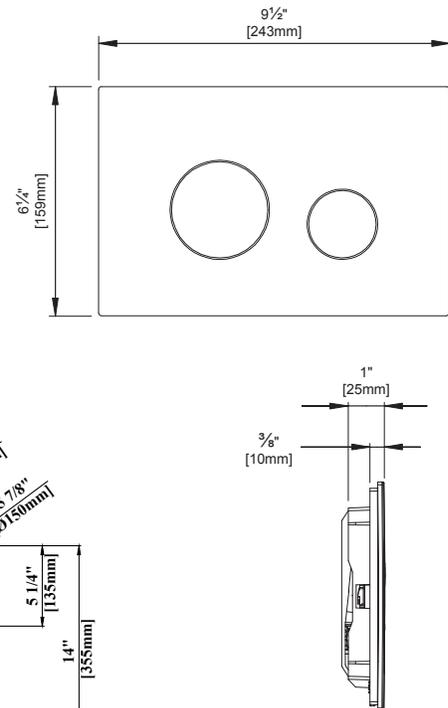


CWT426CMFG

AP Wall-Hung Toilet, 1.28 GPF & 0.9 GPF


INSTALLATION NOTES

WT172M

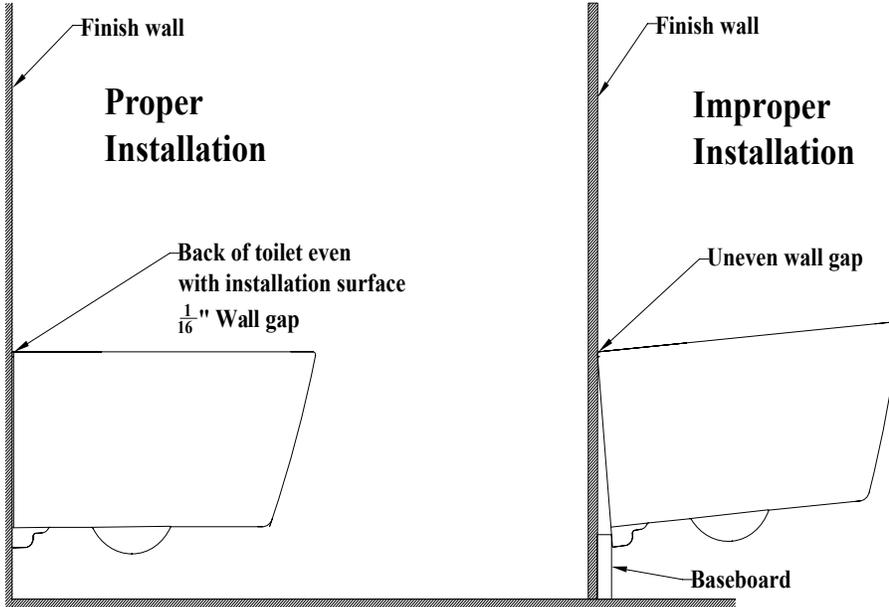

DIMENSIONS

WT172M

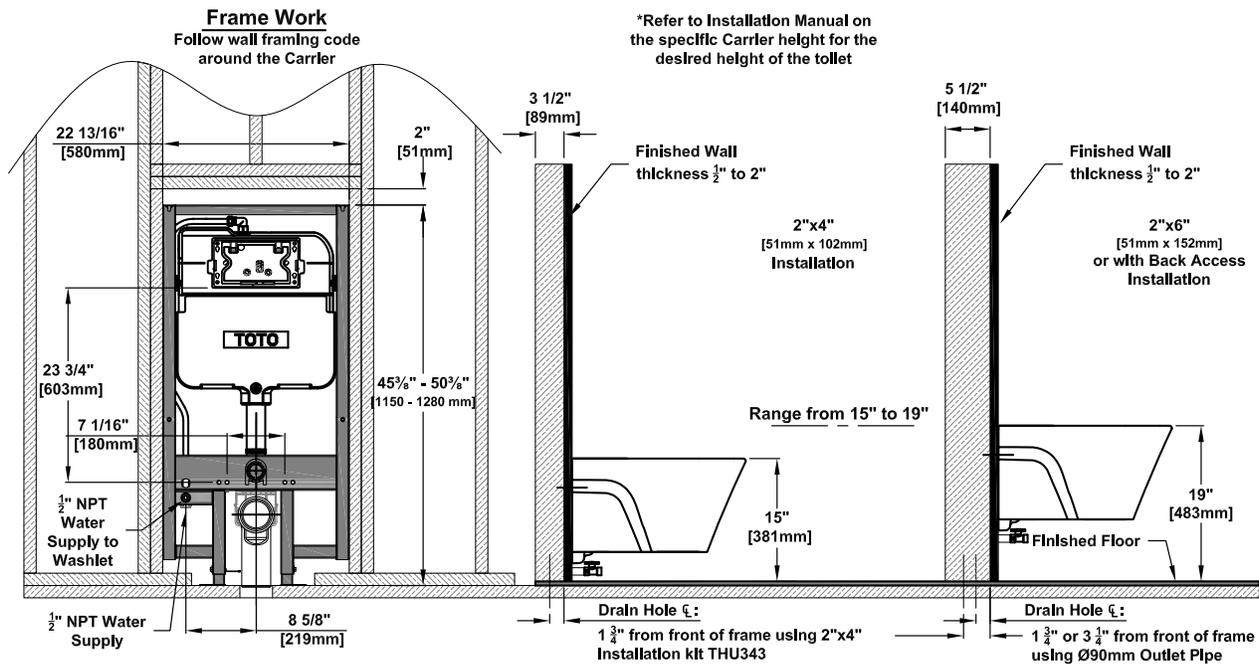

TOTO

These dimensions and specifications are subject to change without notice